




RANGE OF STOCK

BRASS

We expand our range almost daily,
especially where customer needs are concerned.

We take care of your stocking.
Just tell us what you need.




SHEET

DIN 1751, 17660, 17670
EN 1652

Our processing centre supplies every kind of cut!

Thickness mm	Format Width x length mm	CuZn37					CuZn39Pb2 F 49/WH CW612N R 490
		CuZn15 F 31 CW502L R 300	F 30 CW508L R 300	F 37 CW508L R 350	F 44 CW508L R 410	F 54/WH CW508L	
0.10	300 x 2000			●			
0.20	600 x 2000			●	●		
0.30	600 x 2000		●	●	●		
0.40	600 x 2000		●	●	●	●	
0.50	600 x 2000		●	●	●		●
	1000 x 2000		●	●			
0.60	600 x 2000		●	●	●		
	1000 x 2000		●	●			
0.70	600 x 2000		●	●			●
	1000 x 2000		●	●			
0.80	600 x 2000		●	●	●		●
	800 x 2000		●	●			
	1000 x 2000		●	●			
1.00	600 x 2000		●	●	●		●
	800 x 2000		●	●			
	1000 x 2000		●	●			
	1250 x 2500			●			
1.20	600 x 2000	●	●	●	●		●
	800 x 2000		●	●			
	1000 x 2000		●	●			
1.50	600 x 2000	●	●	●	●		●
	800 x 2000		●	●			
	1000 x 2000		●	●			
2.00	600 x 2000	●	●	●	●		●
	800 x 2000		●	●			
	1000 x 2000		●	●			
2.50	600 x 2000	●	●	●	●		●
	1000 x 2000			●			
3.00	600 x 2000	●	●	●	●		●
	800 x 2000			●			
	1000 x 2000			●			
4.00	600 x 2000		●	●	●		●
	1000 x 2000			●			
5.00	600 x 2000			●			●
	1000 x 2000			●			
6.00	600 x 2000			●			●
	1000 x 2000					●	●
7.00	600 x 2000			●			●
8.00	600 x 2000			●		●	●
	800 x 3000					●	
	1000 x 2000			●			
10.00	800 x 3000					●	
	1000 x 2000						●




SHEET

DIN 1751, 17660, 17670
EN 1652

Our processing centre supplies every kind of cut!

Thickness mm	Format Width x length mm	CuZn15 F 31 CW502L R 300	F 30 CW508L R 300	CuZn37		F 54/WH CW508L	CuZn39Pb2 F 49/WH CW612N R 490
				F 37 CW508L R 350	F 44 CW508L R 410		
10.00	1000 x 3000					●	
12.00	800 x 2000						●
	1000 x 2000						●
	1000 x 3000					●	
15.00	800 x 2000						●
	1000 x 2000						●
	1000 x 3000					●	
16.00	1000 x 2000						●
20.00	1000 x 2000					●	●
22.00	800 x 2000						●
25.00	1000 x 2000					●	●
	1000 x 3000						●
30.00	1000 x 2000						●
	1000 x 3000					●	
35.00	1000 x 2000					●	●
40.00	800 x 3000					●	
	1000 x 2000						●
45.00	800 x 2000						●
	1000 x 2000					●	●
50.00	1000 x 2000					●	●
55.00	1000 x 2000						●
60.00	1000 x 2000						●
70.00	1000 x 2000						●
80.00	600 x 2000					●	
	1000 x 2000						●
90.00	1000 x 2000						●
100.00	600 x 2000					●	
	1000 x 1000						●
120.00	1000 x 2000						●
150.00	1000 x 1000						●




STRIP

DIN 1751, 17660, 17670
EN 1652


**We slit every width from 10mm to 550mm.
Naturally, no minimum quantities.**

Thickness mm	CuZn30 F 42 CW505L R 410	F 30 CW508L R 300	CuZn37		F 54 CW508L R 550	CuZn15 F 26-37 CW502L R 260-350
			F 37 CW508L R 350	F 44 CW508L R 410		
0.20		●	●			●
0.25		●	●	●	●	●
0.30	●	●	●	●	●	●
0.35		●	●	●	●	●
0.40		●	●	●	●	●
0.50		●	●	●	●	●
0.60	●	●	●	●	●	●
0.70		●	●	●	●	
0.75		●	●			
0.80	●	●	●	●	●	●
0.90		●	●	●		
1.00		●	●	●	●	
1.25		●	●	●	●	
1.50		●	●	●	●	●
1.80			●	●		
2.00		●	●	●	●	
2.20		●	●	●		
2.50		●	●	●		
3.00		●	●			

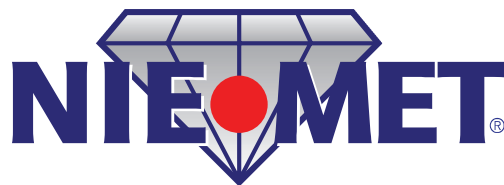

Raw material cycle

Precision and strictest tolerances cut reject costs and simplify processing.
Take advantage of the NIE•MET raw material cycle.



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
3.0	0.5		●
4.0	0.5		●
	1.0		●
5.0	0.5		●
	1.0		●
	2.0		●
6.0	0.3	●	
	0.5		●
	0.7		●
	1.0		●
	1.5		●
	2.0		●
7.0	0.5		●
	1.0		●
	1.5		●
8.0	0.5		●
	0.75		●
	1.0		●
	1.5	●	●
	2.0	●	●
	2.5	●	
9.0	0.5		●
	1.0		●
	1.5	●	●
9.8	1.0		●
10.0	0.5		●
	0.7		●
	1.0		●
	1.5		●
	2.0	●	●
	2.5	●	
	3.0	●	
11.0	0.5		●
	1.0		●
	2.0	●	
	3.5	●	
12.0	0.5		●
	0.7		●
	1.0		●
	1.5	●	●
	2.0	●	●
	2.5	●	●
	3.0	●	

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
12.0	3.5	●	●
13.0	0.5		●
	1.0		●
	1.5		●
	2.0	●	
	2.5	●	●
	3.0	●	
14.0	0.5		●
	1.0		●
	1.5		●
	2.0	●	●
	2.5	●	
	3.0	●	
	3.5	●	
15.0	0.5		●
	0.7		●
	1.0		●
	1.5		●
	2.0	●	
	2.5	●	
	3.0	●	
	3.5		●
	4.0	●	
16.0	0.5		●
	0.7		●
	1.0	●	●
	1.5		●
	2.0	●	●
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
17.0	0.3		●
	0.5		
	1.0		●
	1.5		●
	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
18.0	0.5		●
	1.0		●
	1.5		●



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
18.0	2.0	●	●
	2.5	●	
	3.0	●	
	4.0	●	
19.0	5.0	●	
	0.7		●
	1.0		●
	1.5		●
20.0	2.5	●	
	3.0	●	
	0.5		●
	1.0		●
	1.5	●	●
	2.0	●	●
	2.5	●	●
	3.0	●	●
21.0	3.5	●	
	4.0	●	
	5.0	●	
	5.5	●	
	6.0	●	
	3.0	●	
	4.0	●	
22.0	1.0		●
	1.5		●
	2.0	●	
	2.5	●	
	3.0	●	
23.0	3.5	●	
	4.0	●	
	5.0	●	
	6.0	●	
	0.5		●
	1.0		●
24.0	3.0	●	
	4.0	●	
	0.5		●
	1.0		●
25.0	2.0		●
	2.5		●
	3.0		●
	4.0		●
	5.0		●
26.0	6.0		●
	1.0		●
	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
	5.0	●	
	6.0	●	
	7.5	●	
27.0	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
	5.0	●	
	6.0	●	
28.0	2.0	●	
	2.5	●	
	3.0	●	
	4.0	●	
	5.0	●	
	5.5	●	
	6.0	●	
	8.0	●	
29.0	1.0		●
	1.5		●
	2.0	●	
	2.5	●	
	3.0	●	
30.0	4.0	●	
	5.0	●	
	0.5		●
	1.0		●

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
24.0	4.5	●	
	5.0	●	
	6.0	●	
25.0	0.5		●
	1.0		●
	1.5	●	●
	2.0	●	●
	2.5	●	●
	3.0	●	
	3.5	●	
26.0	4.0	●	
	5.0	●	
	6.0	●	
	7.5	●	
	1.0		●
	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
27.0	5.0	●	
	6.0	●	
	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
28.0	5.0	●	
	6.0	●	
	1.0		●
	1.5		●
	2.0	●	
	2.5	●	
	3.0	●	
	4.0	●	
29.0	5.0	●	
	2.5	●	
	4.0	●	
	5.0	●	
	0.5		●



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved

Dia- meter mm	Wall thickness mm	CuZn39Pb3 CW614N	CuZn37 CW508L	
30.0	1.0		●	
	1.5	●	●	
	2.0	●	●	
	2.5	●	●	
	3.0	●		
	3.5	●		
	4.0	●		
	4.5	●		
	5.0	●		
	5.5	●		
	6.0	●		
31.0	3.0	●		
	32.0	0.5		●
		1.0		●
		1.5		●
		2.0	●	
		2.5	●	
		3.0	●	
		3.5	●	
		4.0	●	
		5.0	●	
		6.0	●	
7.0	●			
33.0	10.0	●		
	2.0	●		
	2.5	●		
	3.0	●		
	3.5	●		
	4.0	●		
	5.0	●		
	9.5	●		
	34.0	1.0		●
		2.0	●	
		3.0	●	
3.5		●	●	

Dia- meter mm	Wall thickness mm	CuZn39Pb3 CW614N	CuZn37 CW508L	
34.0	4.0	●		
	5.0	●		
35.0	0.5		●	
	1.0		●	
	1.5		●	
	2.0	●		
	2.5	●		
	3.0	●		
	3.5	●		
	4.0	●		
	4.5	●		
	5.0	●		
	5.5	●		
36.0	6.0	●		
	7.0	●		
	7.5	●		
	8.0	●		
	9.0	●		
	10.0	●		
	11.0	●		
	12.5	●		
	36.0	0.5		●
		1.0		●
		2.5	●	
3.0		●		
4.0		●		
37.0	6.0	●		
	1.0		●	
	3.0	●		
	4.0	●		
38.0	5.0	●		
	10.0	●		
	1.0		●	
	1.5	●	●	
	2.0	●	●	
	2.5	●		
	3.0	●		
	4.0	●		
	5.0	●		
	6.0	●		
	6.5	●		
7.0	●			
10.0	●			



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
39.0	10.2	●	
40.0	0.5		●
	1.0		●
	1.5		●
	2.0	●	●
	2.5	●	●
	3.0	●	
	3.5	●	
	4.0	●	
	4.5	●	
	5.0	●	
	6.0	●	
	7.0	●	
	7.5	●	
	8.0	●	
	9.0	●	
	10.0	●	
	11.0	●	
	15.0	●	
41.0	4.0	●	
42.0	1.0		●
	1.5		●
	2.0	●	●
	2.5	●	●
	3.0	●	
	3.5	●	
	4.0	●	
	4.5	●	
	5.0	●	
	6.0	●	
	7.5	●	
	8.0	●	
	9.0	●	
	10.0	●	
	12.0	●	
43.0	2.5	●	
	3.0	●	
	4.0	●	
	5.0	●	
	7.0	●	
	9.0	●	
44.0	2.0*	●	
	4.0	●	

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
44.0	6.0	●	
45.0	1.0		●
	1.5		●
	2.0	●	●
	2.5	●	●
	3.0	●	
	4.0	●	
	5.0	●	
	6.0	●	
	8.0	●	
	10.0	●	
	12.0	●	
	15.0	●	
	16.5	●	
	17.5	●	
46.0	3.0	●	
	4.0	●	
	5.0	●	
	9.0	●	
47.0	2.0	●	
	5.5	●	
48.0	1.0		●
	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
	4.5	●	
	7.5	●	
	8.0	●	
	9.0	●	
50.0	0.5		●
	1.0		●
	1.5		●
	2.0*	●	●
	2.5	●	
	3.0	●	
	4.0	●	
	5.0	●	
	6.0	●	
	7.0	●	
	8.0	●	
	10.0	●	



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
50.0	12.5	●	
	15.0	●	
	20.0	●	
51.0	4.5	●	
	7.0	●	
	1.0		●
52.0	2.0		●
	3.0	●	
	3.5	●	
	4.0	●	
	4.5	●	
	5.0	●	
	7.0	●	
53.0	6.5*	●	
54.0	2.0	●	
	5.0	●	
	8.0	●	
55.0	15.0	●	
	1.0		●
	2.0	●	
	2.5	●	
	3.0	●	
	4.0	●	
	5.0	●	
	6.0	●	
	8.0	●	
	8.5	●	
	10.0	●	
56.0	15.0	●	
	2.5	●	
	3.0	●	●
	5.0	●	
	6.0	●	
	8.0	●	
	10.0	●	
	12.5	●	
57.0	1.0		●
	3.0	●	
	4.0	●	
	6.5	●	
58.0	3.0	●	
	4.0	●	
	5.0	●	

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
58.0	12.0	●	
59.0	2.0	●	
60.0	1.0		●
	1.5		●
	2.0	●	
	2.5	●	
	3.0	●	
	3.5	●	
	4.0	●	
	5.0	●	
	6.0	●	
	7.0	●	
	7.5	●	
	8.0	●	
	10.0	●	
	12.5	●	
	15.0	●	
	20.0	●	
62.0	1.0		●
	6.0	●	
	15.0	●	
63.0	5.0	●	
	18.0	●	
64.0	2.0	●	
	5.0	●	
65.0	1.0		●
	1.5		●
	2.5	●	
	3.0	●	
	4.0	●	
	5.0	●	
	8.0	●	
	10.0*	●	
	15.0	●	
66.0	3.0	●	
	5.0	●	
	8.5	●	
68.0	5.0	●	
	7.0	●	
70.0	1.0		●
	1.5		●
	2.0	●	
	3.0	●	



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L	
mm	mm			
70.0	4.0	●		
	5.0	●		
	6.0	●		
	7.0*	●		
	9.0	●		
	10.0	●		
	11.0	●		
	12.5	●		
	15.0	●		
	20.0	●		
71.0	24.5	●		
	3.0	●		
	72.0	3.0	●	
		4.5	●	
	5.0	●		
	6.0	●		
74.0	2.0	●		
	6.0	●		
75.0	1.5	●		
	2.5	●		
	3.0	●		
	5.0	●		
	6.0	●		
	8.0	●		
	10.0	●		
	12.5	●		
	17.5	●		
	20.0	●		
76.0	3.0	●		
78.0	5.0		●	
80.0	1.0		●	
	1.5	●		
	2.0	●		
	2.5	●		
	3.0	●		
	4.0	●		
	5.0	●		
	6.0	●		
	7.0	●		
	8.0	●		
	10.0	●		
	12.5	●		

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
80.0	15.0*	●	
	20.0	●	
82.0	3.0	●	
	7.0	●	
	8.0	●	
85.0	16.0	●	
	2.0	●	
	2.5	●	
	5.0	●	
	7.5	●	
	10.0	●	
	12.0	●	
	12.5	●	
	20.0	●	
	25.0	●	
90.0	2.0		●
	2.5	●	
	3.0	●	
	4.0	●	
	5.0	●	
	6.0	●	
95.0	8.0	●	
	10.0*	●	
	15.0	●	
	20.0	●	
	2.5	●	
	5.0	●	
96.0	8.0	●	
	10.0	●	
	15.0	●	
	3.0	●	
	5.0	●	
98.0	1.0		●
	2.0	●	
	2.5	●	
	3.0	●	
	5.0	●	
	6.0	●	
	7.0	●	
	8.0	●	
	10.0	●	
	12.5	●	
100	15.0	●	



PIPING


DIN 1755, 17660, 17671, 59750, 59752
EN 12449, 12451

CuZn39Pb3 = approx. 3 m long
 CuZn37 = approx. 5 m long

* also termally relieved


Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
100	17.5	●	
	20.0	●	
	30.0	●	
105	2.5		●
	5.0	●	
108	4.0	●	
110	4.0	●	
	5.0	●	
	6.0	●	
	10.0	●	
	25.0	●	
111	18.0	●	
115	2.5	●	
	5.0	●	
	10.0	●	
	15.0	●	
120	2.0	●	
	5.0	●	
	10.0	●	
	15.0	●	
	20.0	●	
	10.0	●	
125	5.0	●	

Dia- meter	Wall thickness	CuZn39Pb3 CW614N	CuZn37 CW508L
mm	mm		
125	10.0	●	
	12.0	●	
	20.0	●	
130	5.0	●	
	10.0	●	
	20.0	●	
	25.0	●	
	30.0	●	
	35.0	●	
133	2.0	●	
	6.0	●	
140	5.0	●	
	10.0	●	
	20.0	●	
150	2.0	●	
	5.0	●	
	10.0	●	
	20.0	●	
160	5.0	●	
	10.0	●	
170	3.0	●	
	20.0	●	




T-PROFILE

Height x width x thickness mm	CuZn 39Pb3 CW614N	Height x width x thickness mm	CuZn 39Pb3 CW614N	Height x width x thickness mm	CuZn 39Pb3 CW614N
10 x 10 x 1.0	●	20 x 20 x 2.0	●	30 x 30 x 3.0	●
x 10 x 2.0	●	25 x 25 x 2.0	●	40 x 40 x 4.0	●
12 x 12 x 2.0	●	x 25 x 3.0	●	50 x 50 x 4.0	●
15 x 15 x 2.0	●	30 x 30 x 2.0	●		



U-PROFILE

Height x width x thickness mm	CuZn 39Pb3 CW614N	Height x width x thickness mm	CuZn 39Pb3 CW614N	Height x width x thickness mm	CuZn 39Pb3 CW614N
6 x 6 x 1.0	●	12 x 12 x 2.0	●	30 x 30 x 2.0	●
8 x 8 x 1.0	●	15 x 15 x 2.0	●	x 30 x 3.0	●
10 x 10 x 1.0	●	20 x 20 x 2.0	●	35 x 35 x 3.0	●
x 10 x 2.0	●	25 x 25 x 2.0	●	40 x 40 x 4.0	●
12 x 12 x 1.0	●	x 25 x 3.0	●		



PROFILE


DIN 17660, 17672, 17674
EN 12163, 12164, 12165, 12167

in lengths of approx. 5 m

Dia-meter mm	Radius mm	CuZn 39Pb3 CW614N
25	5.0	●
25	10.0	●
30	5.0	●
30	8.0	●
30	15.0	●

Dia meter mm	Radius mm	CuZn 39Pb3 CW614N
10	5.0	●
12	6.0	●
16	5.0	●
20	5.0	●
20	10.0	●

Dia meter mm	Radius mm	CuZn 39Pb3 CW614N
35	5.0	●
40	6.0	●
40	12.0	●
40	15.0	●




ANGLE

DIN 17660, 17674

Height x width mm	Thickness mm	CuZn 39Pb3 CW614N
8 x 8	1.0	●
10 x 10	1.0	●
x 10	2.0	●
x 10	3.0	●
12 x 12	1.0	●
x 12	2.0	●
x 12	3.0	●
15 x 10	2.0	●
x 15	1.0	●
x 15	2.0	●
x 15	3.0	●
20 x 10	2.0	●
x 15	2.0	●
x 15	3.0	●
x 20	2.0	●
x 20	3.0	●
x 20	4.0	●
25 x 10	2.0	●
x 15	2.0	●

Height x width mm	Thickness mm	CuZn 39Pb3 CW614N
25 x 20	2.0	●
x 25	2.0	●
x 25	3.0	●
x 25	4.0	●
30 x 10	2.0	●
x 15	2.0	●
x 15	3.0	●
x 20	2.0	●
x 20	3.0	●
x 30	2.0	●
x 30	3.0	●
x 30	4.0	●
x 30	5.0	●
35 x 35	2.0	●
x 35	3.0	●
x 35	4.0	●
x 35	5.0	●
40 x 20	2.0	●
x 20	3.0	●

Height x width mm	Thickness mm	CuZn 39Pb3 CW614N
40 x 20	4.0	●
x 30	3.0	●
x 40	2.0	●
x 40	3.0	●
x 40	4.0	●
x 40	5.0	●
50 x 25	3.0	●
x 25	4.0	●
x 50	3.0	●
x 50	4.0	●
x 50	5.0	●
60 x 40	4.0	●
x 60	5.0	●
x 60	6.0	●




FLAT

DIN 1759, 17660, 17672, 17674
EN 12163, 12164, 12165, 12167

Every flat dimension not listed is supplied, sawn with a width tolerance of 0.1mm, by our processing centre.

Width x thickness mm	CuZn39Pb3 CW614N	Width x thickness mm	CuZn39Pb3 CW614N	Width x thickness mm	CuZn39Pb3 CW614N
5 x 2.0	●	15 x 10.0	●	30 x 25.0	●
x 2.5	●	x 12.0	●	35 x 2.0	●
6 x 2.0	●	16 x 5.0	●	x 3.0	●
x 3.0	●	x 8.0	●	x 4.0	●
x 4.0	●	x 12.0	●	x 5.0	●
6.5 x 5.0	●	18 x 2.0	●	x 6.0	●
7.5 x 6.0	●	x 3.0	●	x 8.0	●
8 x 1.5	●	x 4.0	●	x 10.0	●
x 2.0	●	x 5.0	●	x 12.0	●
x 2.5	●	x 7.0	●	x 15.0	●
x 3.0	●	x 8.0	●	x 20.0	●
x 4.0	●	x 10.0	●	x 25.0	●
x 5.0	●	20 x 2.0	●	40 x 2.0	●
x 6.0	●	x 3.0	●	x 3.0	●
10 x 1.5	●	x 4.0	●	x 4.0	●
x 2.0	●	x 5.0	●	x 5.0	●
x 3.0	●	x 6.0	●	x 6.0	●
x 4.0	●	x 8.0	●	x 8.0	●
x 5.0	●	x 10.0	●	x 10.0	●
x 6.0	●	x 12.0	●	x 12.0	●
x 8.0	●	x 15.0	●	x 15.0	●
12 x 1.5	●	25 x 1.5	●	x 20.0	●
x 2.0	●	x 2.0	●	x 25.0	●
x 2.5	●	x 3.0	●	x 30.0	●
x 3.0	●	x 4.0	●	x 35.0	●
x 3.5	●	x 5.0	●	45 x 3.0	●
x 4.0	●	x 6.0	●	x 4.0	●
x 5.0	●	x 8.0	●	x 5.0	●
x 6.0	●	x 10.0	●	x 6.0	●
x 8.0	●	x 12.0	●	x 8.0	●
x 10.0	●	x 15.0	●	x 10.0	●
14 x 2.0	●	x 20.0	●	x 12.0	●
x 3.0	●	26 x 3.0	●	x 15.0	●
x 4.0	●	30 x 2.0	●	x 20.0	●
x 8.0	●	x 3.0	●	x 25.0	●
x 10.0	●	x 4.0	●	x 30.0	●
15 x 2.0	●	x 5.0	●	x 35.0	●
x 3.0	●	x 6.0	●	50 x 2.0	●
x 4.0	●	x 8.0	●	x 3.0	●
x 5.0	●	x 10.0	●	x 4.0	●
x 6.0	●	x 12.0	●	x 5.0	●
x 7.0	●	x 15.0	●	x 6.0	●
x 8.0	●	x 20.0	●	x 8.0	●




FLAT

DIN 1759, 17660, 17672, 17674
EN 12163, 12164, 12165, 12167

Every flat dimension not listed is supplied, sawn with a width tolerance of 0.1mm, by our processing centre.

Width x thickness mm	CuZn39Pb3 CW614N	Width x thickness mm	CuZn39Pb3 CW614N	Width x thickness mm	CuZn39Pb3 CW614N
50 x 10.0	●	70 x 12.0	●	100 x 10.0	●
x 12.0	●	x 15.0	●	x 12.0	●
x 15.0	●	x 20.0	●	x 15.0	●
x 20.0	●	x 25.0	●	x 20.0	●
x 25.0	●	x 30.0	●	x 25.0	●
x 30.0	●	x 35.0	●	x 30.0	●
x 35.0	●	x 40.0	●	x 35.0	●
x 40.0	●	x 50.0	●	x 40.0	●
55 x 5.0	●	75 x 5.0	●	x 50.0	●
x 6.0	●	x 8.0	●	x 60.0	●
x 8.0	●	x 10.0	●	110 x 8.0	●
x 10.0	●	x 20.0	●	x 10.0	●
x 12.0	●	x 25.0	●	x 20.0	●
x 15.0	●	x 30.0	●	x 30.0	●
x 20.0	●	80 x 4.0	●	x 35.0	●
x 25.0	●	x 5.0	●	120 x 10.0	●
60 x 3.0	●	x 6.0	●	x 12.0	●
x 4.0	●	x 8.0	●	x 15.0	●
x 5.0	●	x 10.0	●	x 20.0	●
x 6.0	●	x 12.0	●	x 25.0	●
x 8.0	●	x 15.0	●	x 30.0	●
x 10.0	●	x 20.0	●	x 40.0	●
x 12.0	●	x 25.0	●	x 50.0	●
x 15.0	●	x 30.0	●	130 x 15.0	●
x 20.0	●	x 40.0	●	x 20.0	●
x 25.0	●	x 50.0	●	140 x 20.0	●
x 30.0	●	x 60.0	●	x 30.0	●
x 35.0	●	90 x 5.0	●	x 40.0	●
x 40.0	●	x 6.0	●	x 60.0	●
65 x 5.0	●	x 8.0	●	150 x 10.0	●
x 6.0	●	x 10.0	●	x 12.0	●
x 8.0	●	x 12.0	●	x 15.0	●
x 10.0	●	x 15.0	●	x 20.0	●
x 12.0	●	x 20.0	●	x 25.0	●
x 20.0	●	x 25.0	●	x 30.0	●
x 25.0	●	x 30.0	●	x 40.0	●
x 30.0	●	x 35.0	●	x 50.0	●
x 35.0	●	x 40.0	●	200 x 10.0	●
70 x 4.0	●	x 50.0	●	x 12.0	●
x 5.0	●	x 60.0	●	x 15.0	●
x 6.0	●	100 x 5.0	●	x 20.0	●
x 8.0	●	x 6.0	●	x 30.0	●
x 10.0	●	x 8.0	●	x 40.0	●




FLAT

DIN 1759, 17660, 17672, 17674
EN 12163, 12164, 12165, 12167

Every flat dimension not listed is supplied, sawn with a width tolerance of 0.1mm, by our processing centre.


Width x thickness mm	CuZn39Pb3 CW614N	Width x thickness mm	CuZn39Pb3 CW614N
200 x 50,0	●	250 x 20,0	●



SQUARE

DIN 1761, 17672, 17660
EN 12163, 12164, 12165, 12167

Edge length mm	CuZn39Pb3 CW614N	Edge length mm	CuZn39Pb3 CW614N	Edge length mm	CuZn39Pb3 CW614N
3.0	●	18.0	●	42.0	●
4.0	●	19.0	●	45.0	●
4.5	●	20.0	●	46.0	●
5.0	●	22.0	●	50.0	●
5.5	●	24.0	●	55.0	●
6.0	●	25.0	●	60.0	●
7.0	●	26.0	●	65.0	●
8.0	●	27.0	●	70.0	●
9.0	●	28.0	●	80.0	●
10.0	●	30.0	●	90.0	●
11.0	●	32.0	●	100.0	●
12.0	●	34.0	●	110.0	●
13.0	●	35.0	●	120.0	●
14.0	●	36.0	●	130.0	●
15.0	●	38.0	●	150.0	●
16.0	●	40.0	●		
17.0	●	41.0	●		



ROUND

DIN 1756, 1782, 17660, 17672

EN 12163, 12164, 12165, 12167

Dia- meter mm	CuZn 39Pb3 CW614N	CuZn 35Ni2Mn CW710R	CuZn 38Pb2 CW608N
---------------------	-------------------------	---------------------------	-------------------------


1.4	●		
2.0	●		
2.5	●		
3.0	●		
3.2	●		●
3.5	●		
4.0	●	●	●
4.5	●		
4.8			●
5.0	●		●
5.5	●		
6.0	●		●
6.2	●		
6.5	●		
7.0	●		●
7.5	●		
8.0	●		●
8.5	●		
9.0	●		●
9.5	●		
10.0	●	●	
10.5	●		
11.0	●		
11.5	●		
12.0	●	●	●
12.5	●		
13.0	●		
13.5	●		
14.0	●	●	
14.5	●		●
15.0	●	●	
15.5	●		
16.0	●	●	●
16.5	●		
17.0	●		●
17.5	●		
18.0	●	●	●
18.5	●		
19.0	●	●	
19.5	●		
20.0	●	●	●
20.5	●		
21.0	●		

Dia- meter mm	CuZn 39Pb3 CW614N	CuZn 35Ni2Mn CW710R	CuZn 38Pb2 CW608N
---------------------	-------------------------	---------------------------	-------------------------

21.5	●		
22.0	●	●	
22.5	●		
23.0	●		
23.5	●		
24.0	●	●	
25.0	●	●	●
25.5	●		
26.0	●	●	
27.0	●		
27.5	●		
28.0	●	●	
29.0	●		
30.0	●	●	●
31.0	●		
32.0	●	●	
33.0	●		
34.0	●	●	
35.0	●	●	
36.0	●	●	●
37.0	●		
38.0	●		
39.0	●		
40.0	●	●	
41.0	●		
42.0	●	●	
43.0	●		
44.0	●		
45.0	●	●	
46.0	●		●
48.0	●	●	
50.0	●	●	
52.0	●		
53.0	●		
55.0	●	●	
56.0	●		
58.0	●		●
60.0	●	●	
63.0	●		
65.0	●	●	
70.0	●	●	
75.0	●	●	
80.0	●	●	

Dia- meter mm	CuZn 39Pb3 CW614N	CuZn 35Ni2Mn CW710R	CuZn 38Pb2 CW608N
---------------------	-------------------------	---------------------------	-------------------------

81.0	●		
85.0	●		
90.0	●	●	
95.0	●	●	
100.0	●		
105.0	●		
110.0	●	●	
115.0	●		
120.0	●		
125.0	●		
130.0	●	●	
135.0	●		
140.0	●	●	
145.0	●		
150.0	●		
160.0	●		
170.0	●		
180.0	●		
185.0	●		
190.0	●		
200.0	●		
210.0	●		
220.0	●		
230.0	●		
250.0	●		
280.0	●		
300.0	●		
350.0	●		



HEXAGONAL

DIN 17660, 1763, 17672

Spanner width mm	CuZn 39Pb3 CW614N	CuZn 36Ni2 CW710R	Spanner width mm	CuZn 39Pb3 CW614N	CuZn 36Ni2 CW710R	Spanner width mm	CuZn 39Pb3 CW614N	CuZn 36Ni2 CW710R
2.5	●		17.5	●		38.0	●	
3.0	●		18.0	●		40.0	●	
3.5	●		19.0	●	●	41.0	●	●
4.0	●		20.0	●		42.0	●	
4.5	●		21.0	●		43.0	●	
5.0	●		22.0	●		46.0	●	●
5.5	●		23.0	●		48.0	●	
6.0	●		24.0	●	●	50.0	●	
7.0	●		25.0	●		55.0	●	●
8.0	●		26.0	●		60.0	●	
9.0	●		27.0	●	●	65.0	●	
10.0	●		28.0	●		70.0	●	
11.0	●		29.0	●		75.0	●	
12.0	●		30.0	●	●	80.0	●	
13.0	●		32.0	●	●	85.0	●	
14.0	●	●	33.0	●		90.0	●	
15.0	●		34.0	●		100.0	●	
16.0	●		35.0	●		110.0	●	
17.0	●	●	36.0	●	●			

What you once paid the full price for should also be completely worth it. Take full advantage of the NIE•MET raw material cycle, e.g. of our reworking. We collect your brass chips, take them away for smelting and deliver the reworked material to you as required. You exploit this cycle until your brass has been completely processed, and pay only the cost of NIE•MET reworking.